



DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

GOOD EVENING
AND
WELCOME





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION

*INFORMATIONAL MEETING
ENFIELD STREET SCHOOL
ALL-PURPOSE ROOM*

JUNE 13, 2018





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

DISCUSSION TOPICS

1. TOWN OF ENFIELD MANAGEMENT TEAM
2. DESCRIPTION OF PROJECT
3. CONCRETE SIDEWALKS REMOVE THROUGH DRIVEWAYS
4. WHAT TO EXPECT
5. PRIVATE DRAINAGE CONNECTIONS, SPRINKLER SYSTEMS,
MAILBOXES AND BITUMINOUS CURBING
6. SCHEDULE FOR 2018
7. CLOSING COMMENTS AND QUESTIONS





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

TOWN OF ENFIELD MANAGEMENT TEAM

JONATHAN S. BILMES, P.E., DIRECTOR OF PUBLIC WORKS

JOHN CABIBBO, P.E., ASSISTANT TOWN ENGINEER

DONALD T. NUNES, ROADS ENGINEER

J.P. RODRIGUEZ, ROADS ENGINEER





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE



TOWN OF ENFIELD CONSTRUCTION INSPECTOR

AECOM

JEFFREY KEEFE, P.E. – PROJECT MANAGER

JORDAN C. TOMLIN – CONSTRUCTION INSPECTOR





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE



TOWN OF ENFIELD CONSTRUCTION COMPANY

King Construction Inc

JON KING
VICE-PRESIDENT





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

DESCRIPTION OF PROJECT

As part of the continual efforts of the Town Council, Town Manager and Department of Public Works to upgrade Enfield's roadway system, in conjunction with the ROADS 2015 Referendum, the Engineering Office issued construction plans and specifications for the full-depth reconstruction of:

- College Street 802'
- Pleasant Street 795'


and the reclamation of the existing base of:

- Laurel Street' 2,600'

Total of 4,197' of new road.



THOMPSONVILLE SOUTHEAST

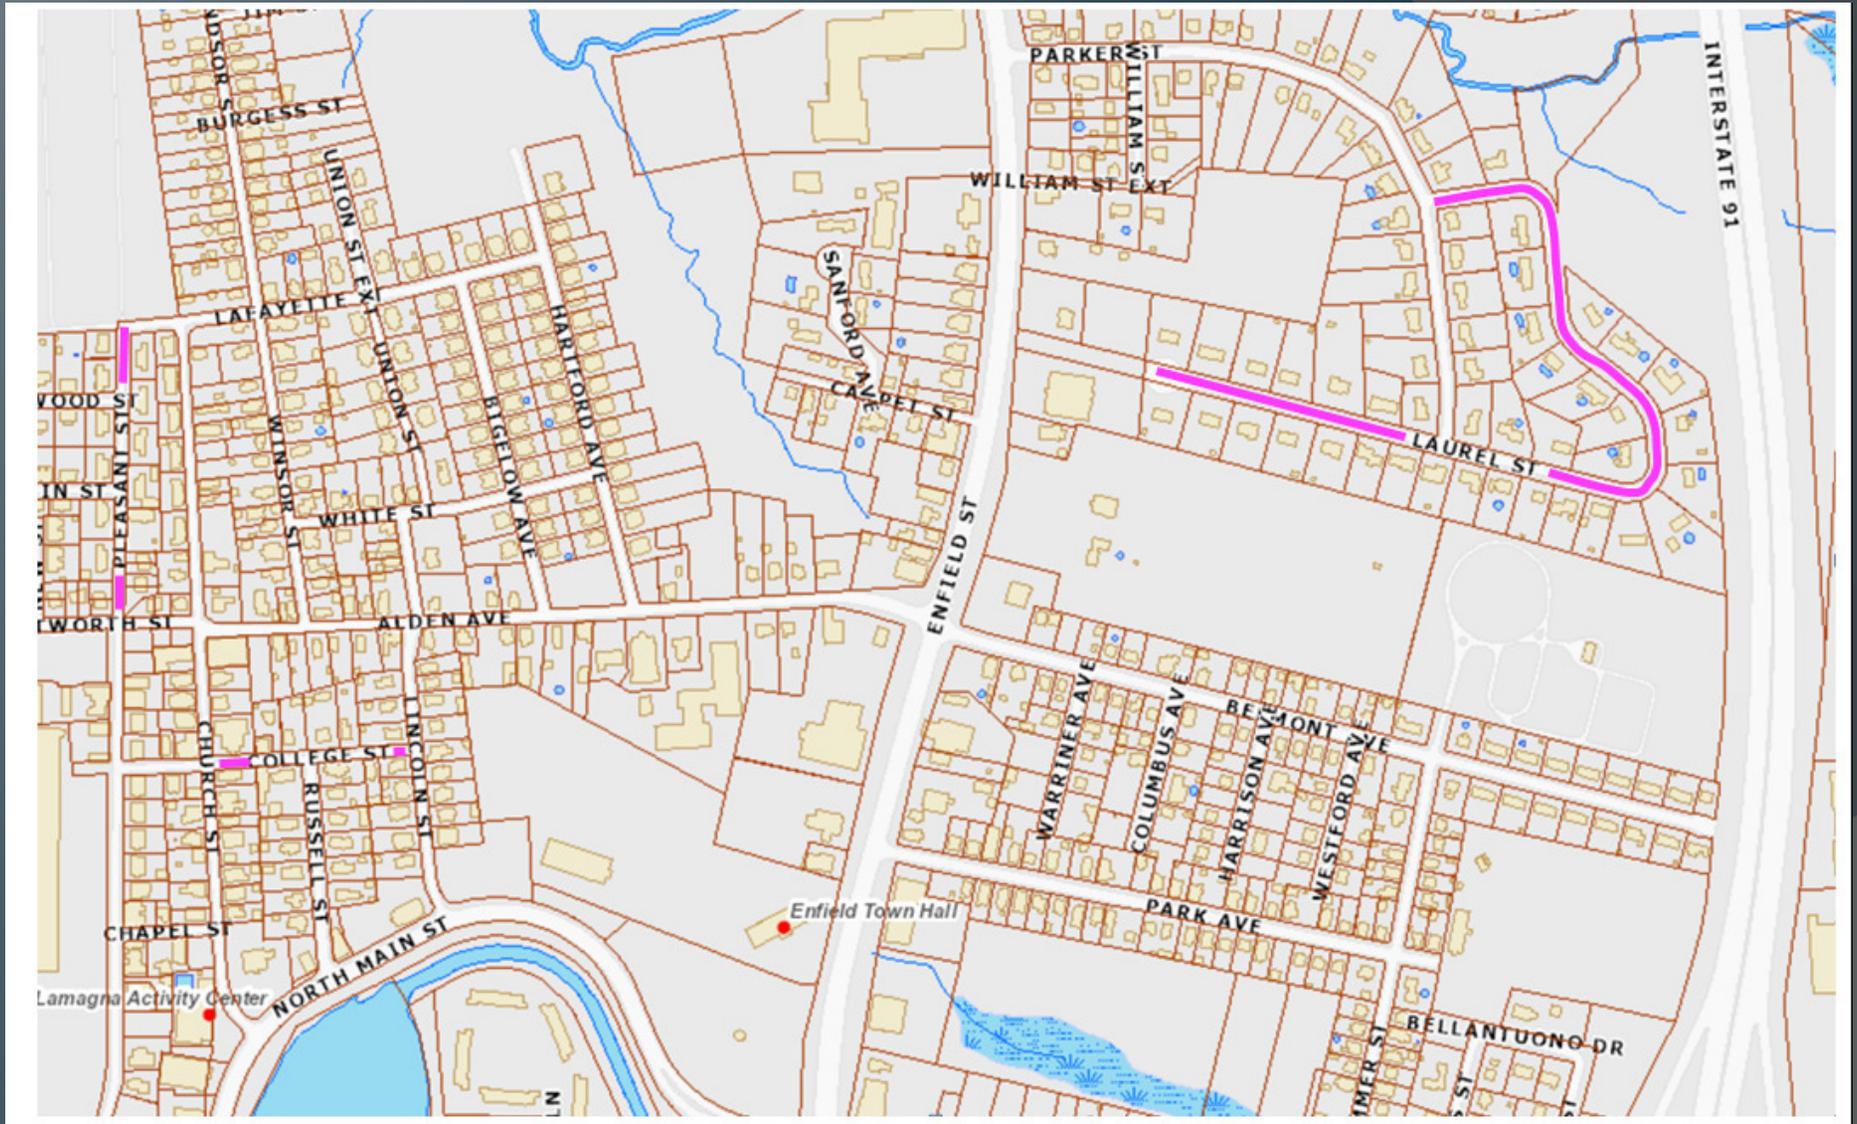



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

WHAT IS FULL-DEPTH RECLAMATION?

Asphalt pavement recycling process

- Economical, in-place recycling alternative to road reconstruction
- Uses a powerful machine to turn asphalt pavement into road base
- Uniformly pulverizes the old pavement and blends it with underlying material
- Utilizes stabilization agents to enhance the strength of the new base
- Saves \$ and resources by using existing materials.
- All full-depth reclamation material will be used on-site





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT


WHAT IS FULL-DEPTH RECONSTRUCTION?

- Removal of existing roadway pavement and base material
- Removal of driveway aprons.
- Drainage improvements.
- Installation of new roadway base material.
- Installation of new curb.
- Installation of new roadway pavement and driveway aprons
- Loam and seed of all disturbed areas.



FULL DEPTH RECLAMATION



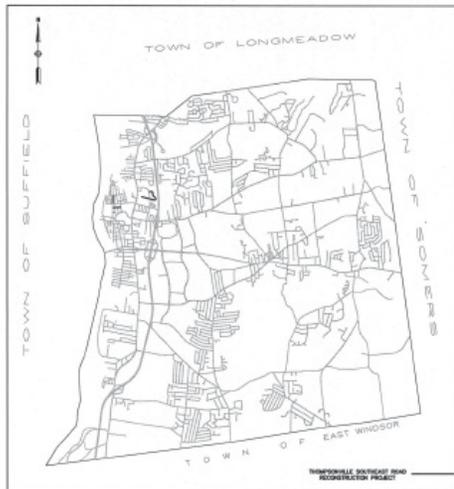

PROJECT ROADWAY MAP



CONTENTS

01	TITLE SHEET
02	LEGEND, ABBREVIATIONS, & GENERAL NOTES
03	INDEX PLANS
05	DETAILED ESTIMATE
07	MISCELLANEOUS DETAILS
15	INLAND WETLANDS AND WATERCOURSES PERMIT
16	TYPICAL SECTIONS
17	DRIVEWAY TABLES
20	EXISTING CONDITIONS
24	CONTROL POINT TIE PLANS
26	COLLEGE STREET - PLAN
27	COLLEGE STREET - PROFILE
28	COLLEGE STREET - DRAINAGE PLAN
29	LAUREL STREET - PLAN AND PROFILE
34	PLEASANT STREET - PLAN
35	PLEASANT STREET - PROFILE
36	HARTFORD AVENUE - PLAN
37	GRADING PLANS
40	SANITARY PLANS
45	TRAFFIC CONTROL PLAN
46	CROSS SECTIONS

CONNDOT STANDARD DRAWINGS

HW_INX	HIGHWAY STANDARD SHEET INDEX
HW-507_01	TYPE "C", "C-L" & DROP INLET CATCH BASIN
HW-507_07	TYPE "C" & "C-L" CATCH BASIN TOPS AND CURBS
HW-507_08	CATCH BASIN FRAMES AND GRATES
HW-507_10	MANHOLE - FRAME & COVER
TR-STD_INDEX	TRAFFIC STANDARD SHEET INDEX
TR-1208_01	SIGN, SUPPORT & SIGN PLACEMENT DETAILS, GORE EXIT SIGN
TR-1208_02	METAL SIGN POSTS AND SIGN MOUNTING DETAILS
TR-1210_04	PAVEMENT MARKING LINES AND SYMBOLS
TR-1210_08	PAVEMENT MARKINGS FOR NON FREEWAYS
TR-1220_02	CONSTRUCTION SIGN SUPPORTS AND CHANNELIZING DEVICES

TOWN OF ENFIELD, CT THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT CONTRACT NO. 18-4




BRYAN R. H. CHODKOWSKI
TOWN MANAGER

MICHAEL S. LUDWICK
MAYOR

JONATHAN S. BILMES, P.E.
DIRECTOR OF PUBLIC WORKS

VARIOUS LOCATIONS

APRIL, 2018

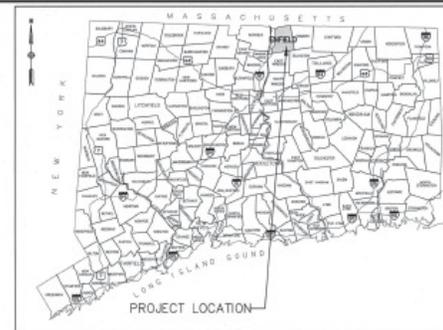

LOCATION MAP

2016 CONNECTICUT DEPARTMENT OF
TRANSPORTATION SPECIFICATIONS FORM 817
INCLUDING ALL SUPPLEMENTAL
SPECIFICATIONS THERETO GOVERN.

DESIGNED BY: VHB
100 GREAT MEADOW ROAD, SUITE 200
WETHERSFIELD, CT 06109

LIST OF ROADWAYS (STRUCTURAL IMPROVEMENTS)


STREET NAME	BEGIN STREET	END STREET	STREET CLASS
COLLEGE STREET	PLEASANT STREET	LINCOLN STREET	LOCAL
LAUREL STREET	DA-DE-SAC	PARKER STREET	LOCAL
PLEASANT STREET	WORTH STREET	LAFAYETTE STREET	LOCAL





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT


COLLEGE & PLEASANT STREETS TYPICAL SECTION – FULL RECONSTRUCTION

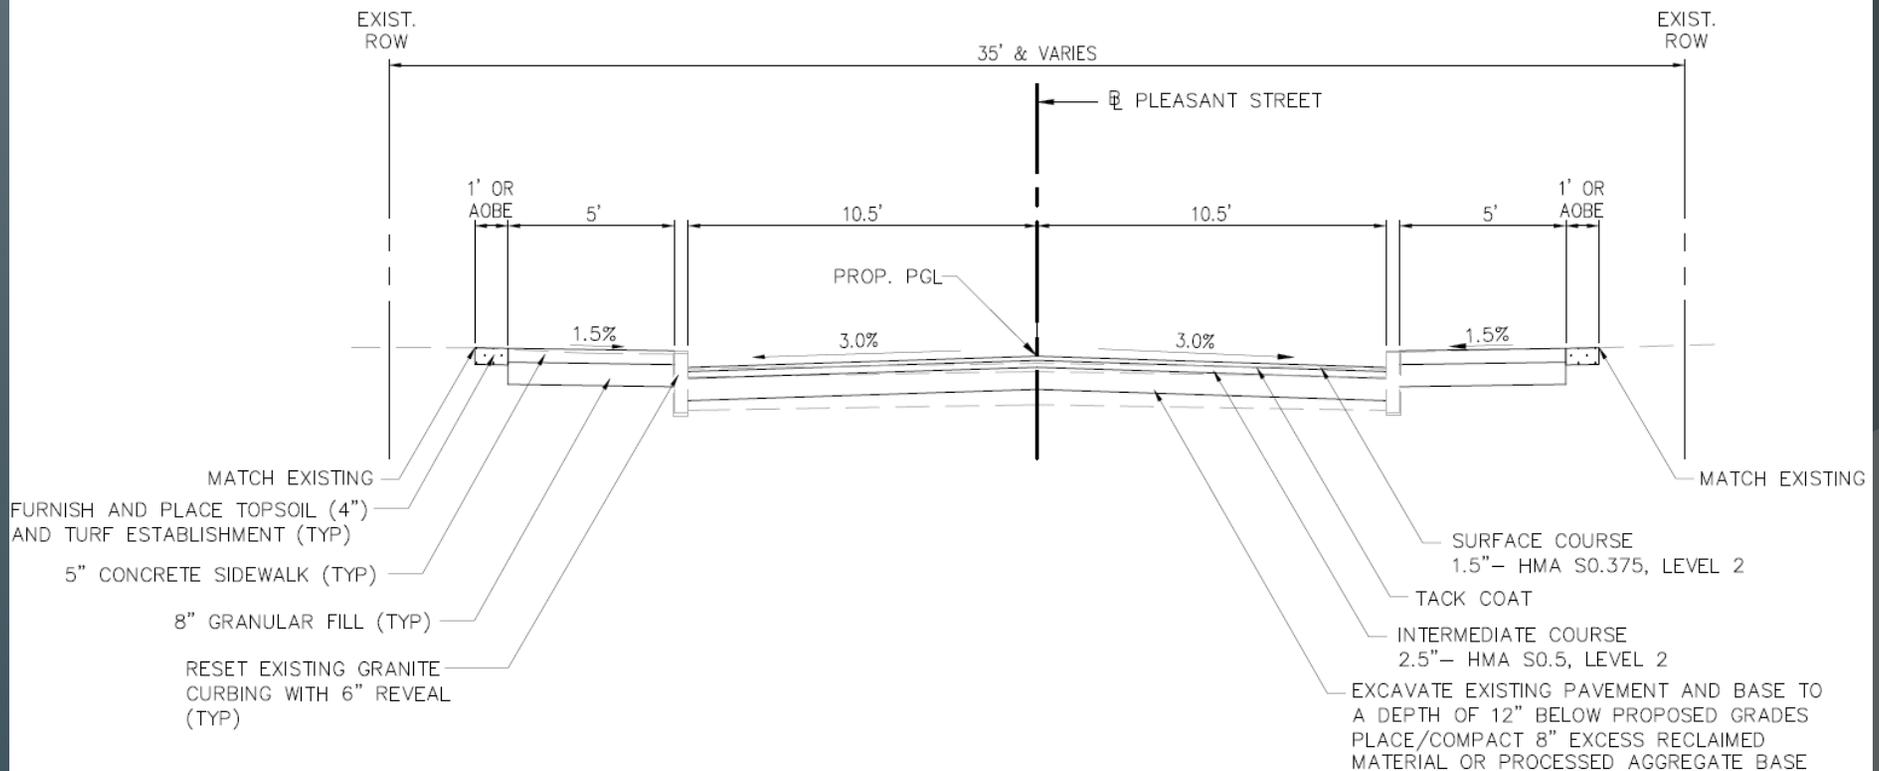



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT


LAUREL STREET TYPICAL SECTION - RECLAIM MATERIAL AS BASE

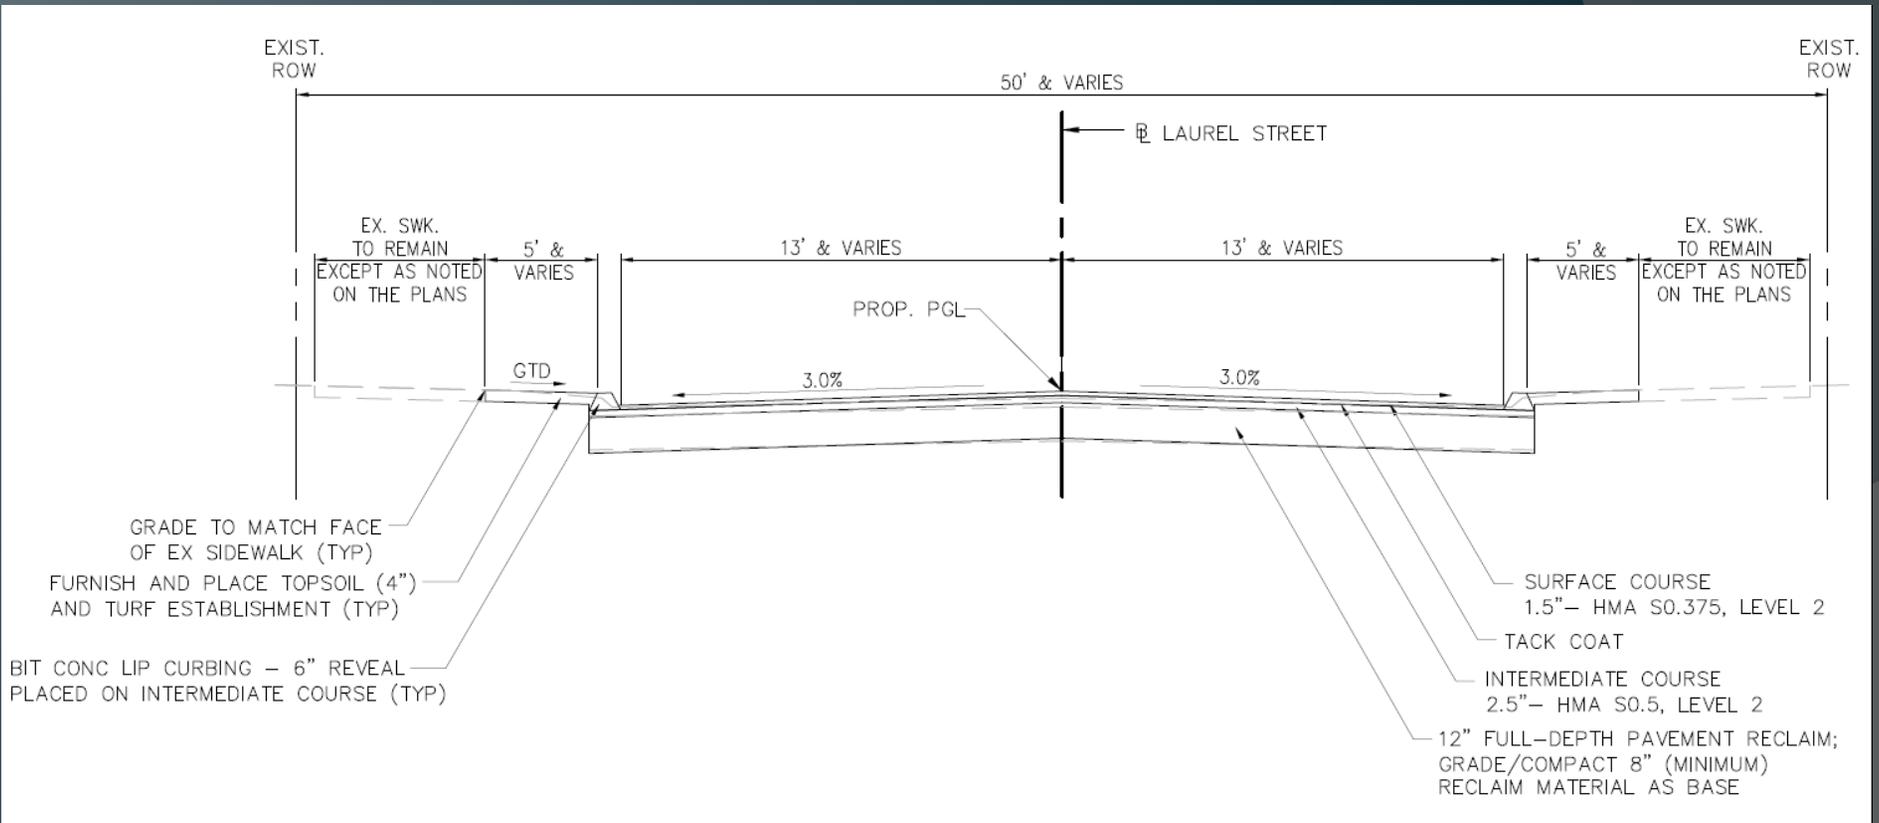



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT


COLLEGE STREET PLAN VIEW - SEWER IMPROVEMENTS

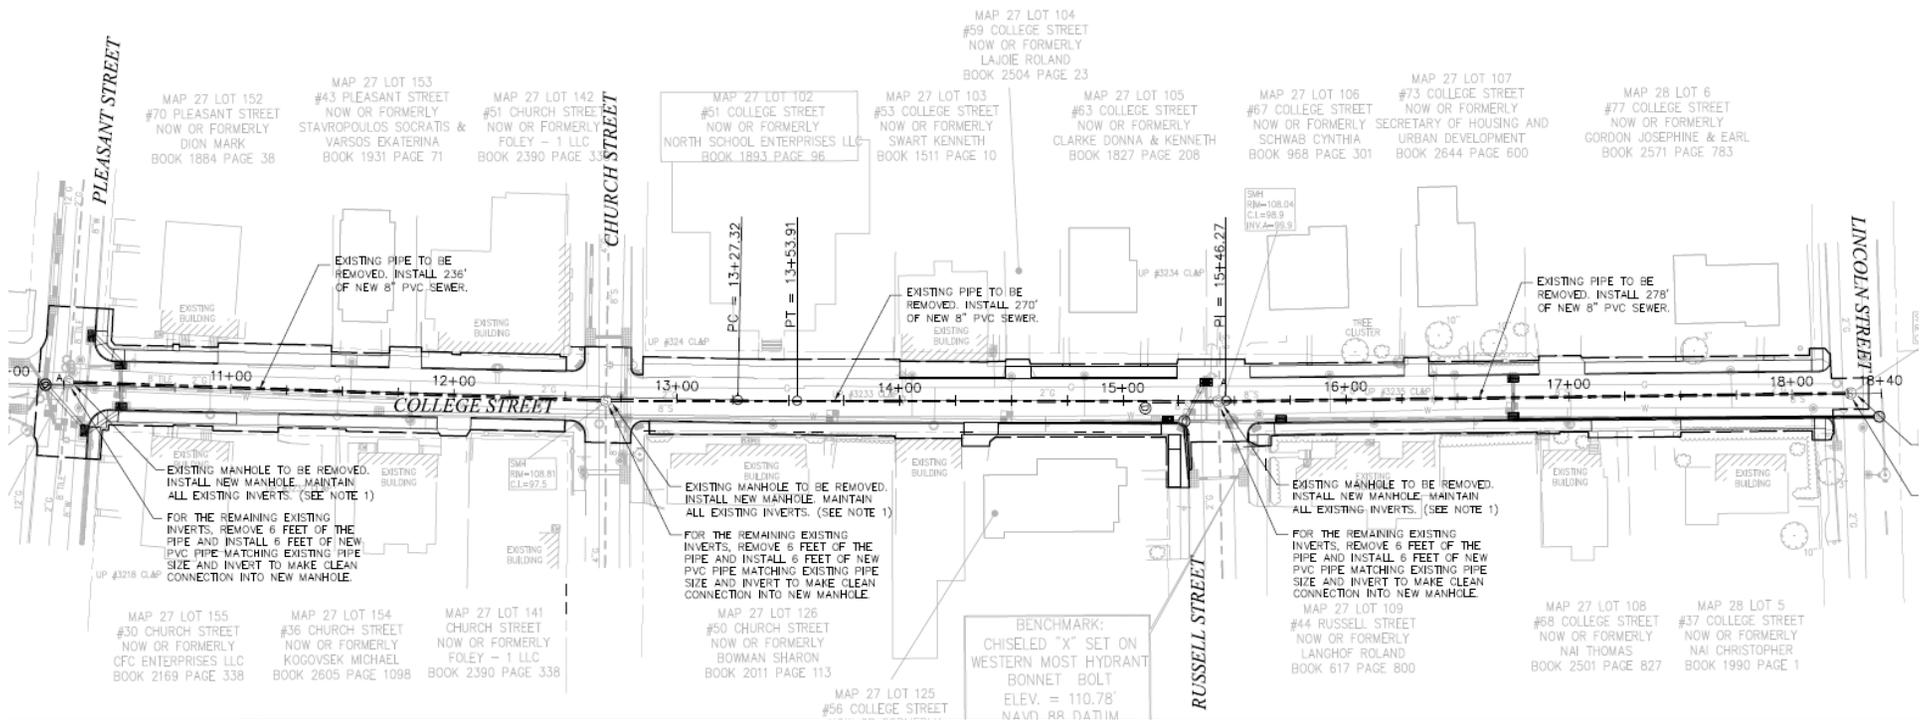




THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

PLEASANT STREET PLAN VIEW - SEWER IMPROVEMENTS

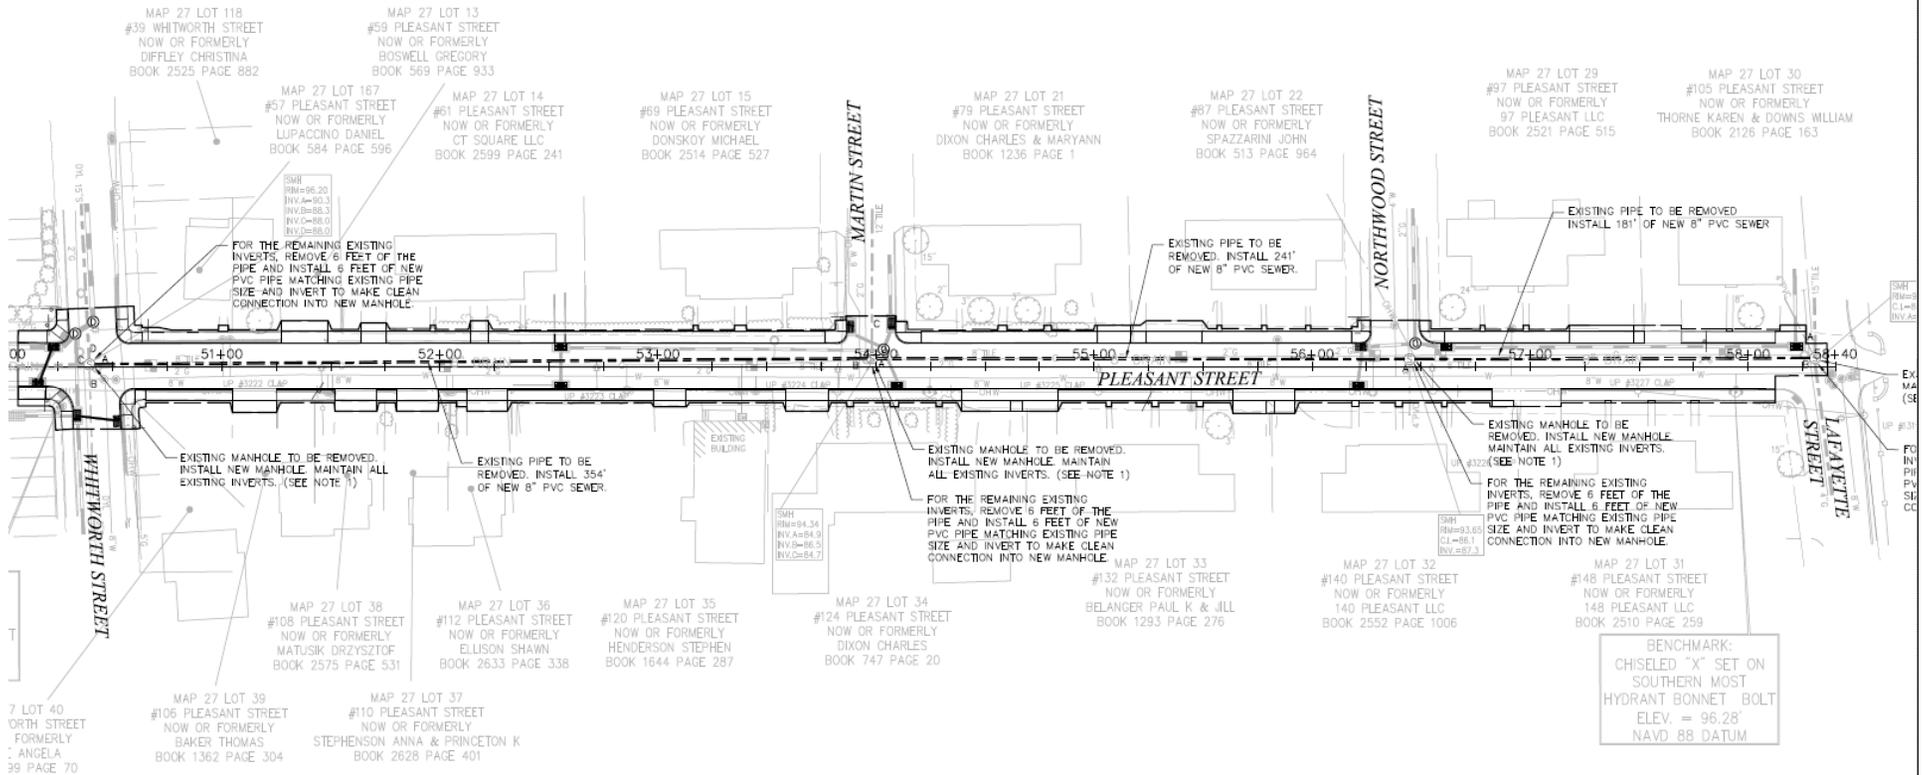



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT LAUREL STREET - PLAN VIEW

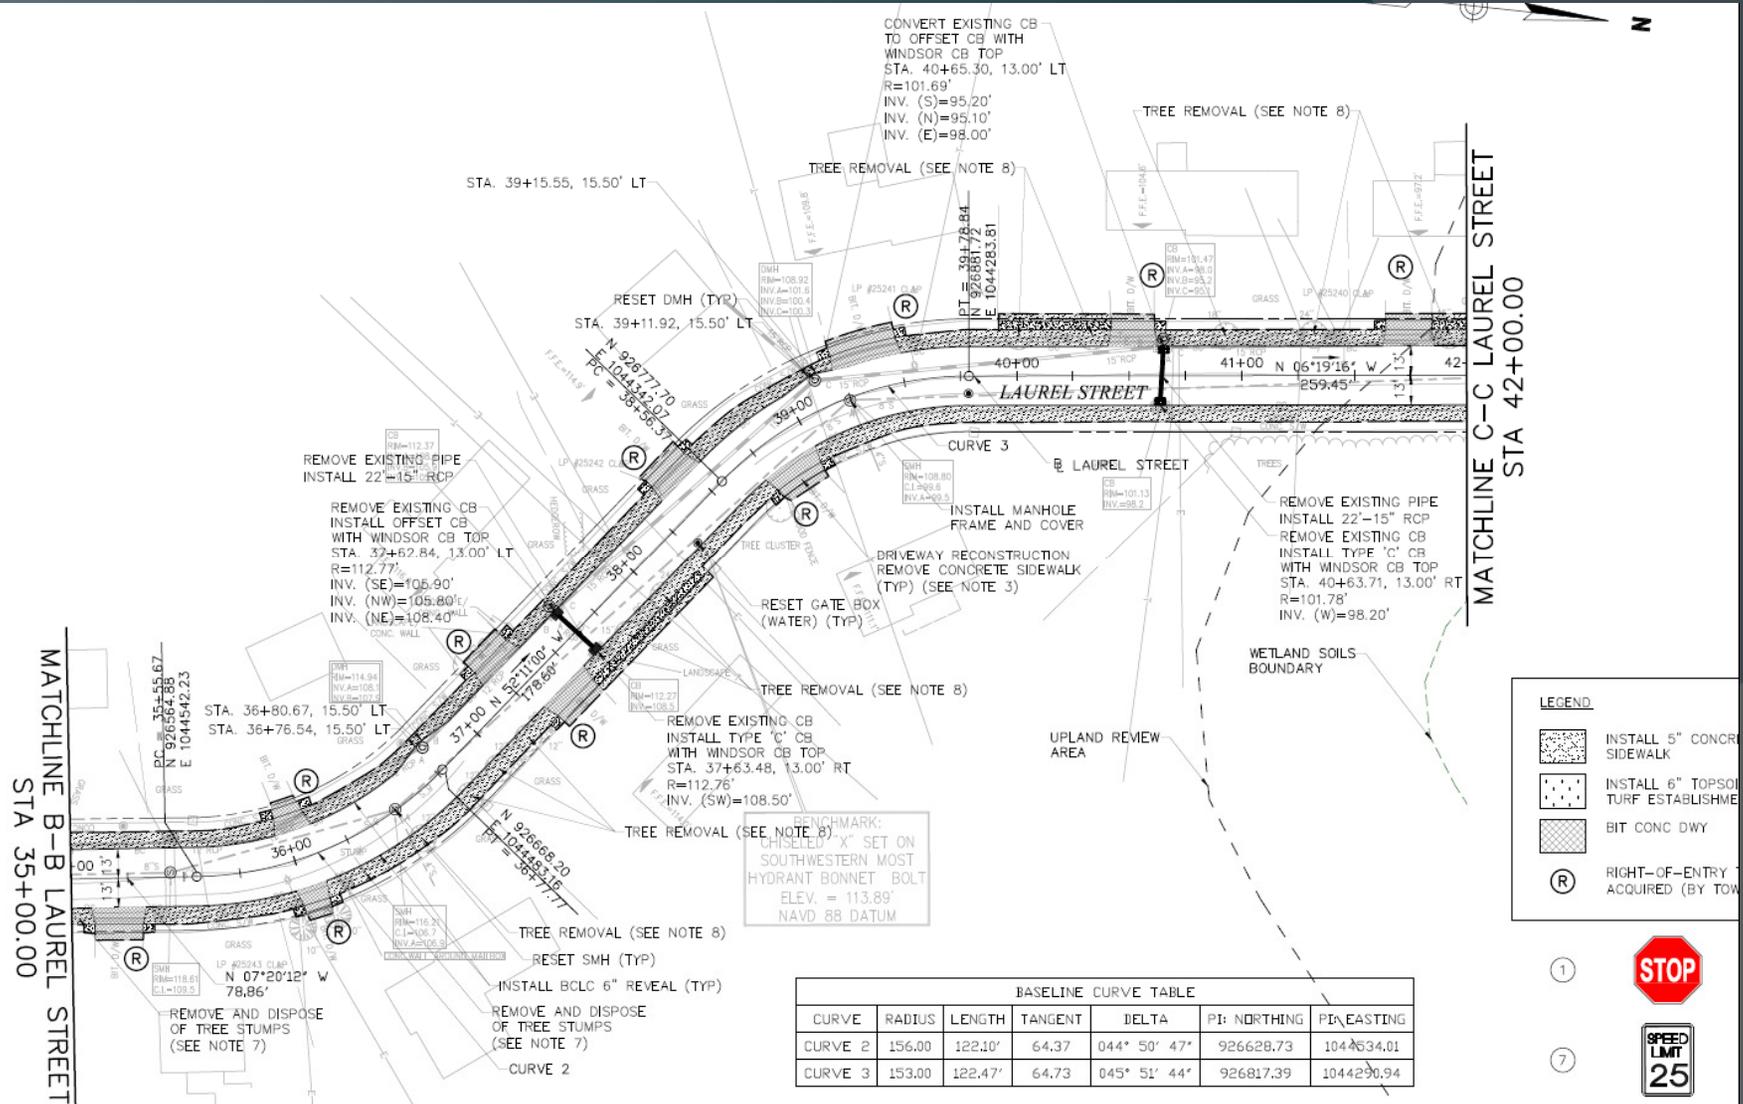



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

SIDEWALKS THROUGH DRIVEWAYS



TOWN OF ENFIELD

IMPORTANT NOTICE!

ROADS 2015 REFERENDUM ROAD RECONSTRUCTION PROJECT

TO: Residents / Landowners

FROM: Town of Enfield Department of Public Works

RE: *Thompsonville Southeast Road Reconstruction Project: Sidewalk through driveway removal*

DATE: Tuesday, February 20, 2018

Thompsonville Southeast Road Reconstruction Project is tentatively scheduled to begin in May 2018. The project involves the complete, full-depth reconstruction of College Street, Pleasant Street and Laurel Street.

Pursuant to a September 5, 2017 Town Council adopted policy, all concrete sidewalks through the driveways will be removed and replaced with asphalt. Driveways and sidewalks constructed of materials other than asphalt or concrete, such as pavers or bricks, will be considered on a case-by-case basis for replacement.

For your convenience, please visit www.enfield-ct.gov/1112 to view the "Sidewalk Through Driveway Policy." If you have any questions or concerns regarding this project or this notice, please contact Mr. J.P. Rodriguez at 860-763-7095 or via email at jrodriguez@enfield.org. Thank you.



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

- Town Council Policy
- Remove concrete walks at driveway
- Petition process for objections
- Policy effective Sept. 18, 2017





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE


WHAT TO EXPECT





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

PAVEMENT MARKINGS

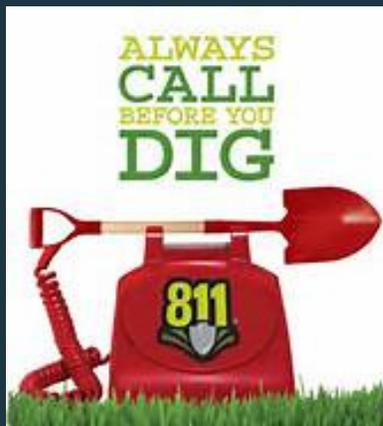

White	Proposed excavation
Pink	Temporary survey markings
Red	Electric power lines, cables, conduits and lighting cables
Yellow	Gas, oil, steam, petroleum or gaseous materials
Orange	Communication, alarm or signal lines, cables or conduits and traffic loops
Blue	Potable water
Purple	Reclaimed water, irrigation and slurry lines
Green	Sewer and drain lines



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

SURVEY MARKINGS





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

BARRICADES





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

MACHINERY





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

MACHINERY





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

DRAINAGE MANHOLES AND PIPES





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

DRAINAGE MANHOLES AND PIPES





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

ACCESS TO YOUR PROPERTY

ALL RESIDENTS WILL BE ALLOWED REASONABLE ACCESS TO AND FROM THEIR PROPERTY DURING THE DAY.

IF THERE ARE SPECIAL CIRCUMSTANCES AND/OR YOU NEED TO LEAVE AT CERTAIN TIMES OF THE DAY, PLEASE CONTACT OUR INSPECTOR SO HE CAN COORDINATE ACTIVITIES WITH THE CONTRACTOR.

ALL RECYCLING/REFUSE ACTIVITIES WILL CONTINUE AS SCHEDULED BUT MAY START EARLIER THAN NORMAL TO AVOID CONFLICTS BETWEEN OUR TRUCKS & THE CONTRACTOR. IN ANY CASE, PICKUPS WILL NOT COMMENCE BEFORE 6 A.M AND ONLY IF NECESSARY AND ONLY FOR LIMITED TIME.

ALL BUS PICKUP AND DROPOFF WILL CONTINUE AS SCHEDULED.





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

RIGHTS OF ENTRY

I, John Smith, owner of the property known as lot 123 of assessors map 456 also known as 789 Main Street in the Town of Enfield, grant the Town of Enfield through their agents and contractors, the right to access and enter into and upon said property to remove, re-grade and replace a portion of the driveway apron to match the grade of the newly reconstructed road edge.

This right to enter is given subject to the following conditions:

- A. The Town shall save the owner harmless from any and all claims for damages arising during the work.
- B. The Town shall loam, seed, fertilize and mulch all areas of the property disturbed or damaged during this work, at no cost to the owner.
- C. After the aforementioned work has been completed, the owner shall save the Town of Enfield harmless from any claims for damages.



Signed: _____

Dated: _____



THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

RIGHTS OF ENTRY

PLEASE SEE ME AFTER THE MEETING





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

PRIVATE DRAINAGE
CONNECTIONS,
SPRINKLER SYSTEMS,
MAILBOXES,
&
ASPHALT CURBING





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

PRIVATE DRAINAGE CONNECTIONS





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

PRIVATE DRAINAGE CONNECTIONS

If you AGREE to connect.....

- A recordable right of entry and/or documentation will be required
- The Town will do the work from the R.O.W. to the drainage system
- The resident will be required to permanently maintain
- The Town will not be liable for any damages
- Official paperwork will be given with ample notice for your review

If you DO NOT AGREE to connect.....

- The Town will sever the connection at the R.O.W. line





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

IRRIGATION SYSTEMS





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

MAILBOXES





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

CURBING





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

SCHEDULE FOR 2018





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

CONSTRUCTION IS TENTATIVELY SCHEDULED TO BEGIN ON:

LAUREL STREET ON JUNE 20, 2018

WORK HOURS ARE TYPICALLY 7:00AM – 4:00PM
MONDAY THROUGH FRIDAY

THE CONTRACTOR MAY OCCASSIONALLY WORK SATURDAYS.
IF SO, A SIGN WILL BE POSTED AT THE ENTRANCES
TO THE STREET AT LEAST 24 HOURS PRIOR.





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT

ENGINEERING OFFICE NOTIFICATIONS

- All residents will be notified approximately one-two weeks in advance, by mail, when the reconstruction of your phase will begin.





THOMPSONVILLE SOUTHEAST ROAD RECONSTRUCTION PROJECT CONSTRUCTION UPDATES



What's Happening in Enfield



Community Voice

Community Voice connects you to your local government. Through using this service, you will have the opportunity to provide your personal input on hot topics regarding development, services, and more. Join in on the discussions and preview your and other community members' Community Voice activity!

[Read More](#)

ROADS 2015 & Road Construction

Preview the effects of the Town's highway maintenance services. You can stay up to date on ongoing road projects, and you can also learn about the ROADS program. The Enfield Public Works Department is hard at work year-round to provide the community with the quality work it deserves.

[Read More](#)

Contact Us

John Cabibbo
Assistant Town Engineer
Ph: 860-253-6366
[Email](#)

Donald Nunes
ROADS Engineer
Ph: 860-272-3541
[Email](#)

J.P. Rodriguez
ROADS Engineer
Ph: 860-763-7095
[Email](#)

820 Enfield Street
Enfield, CT 06082

Capital Improvement
Projects



Report
Concern



Notify Me®



Online
Payments



Agendas &
Minutes



Let Us Know

[Home](#) > [Your Government](#) > [Departments 1 - Z](#) > [Public Works](#) > [Engineering](#) > [Construction Project Updates](#)

Current ROADS 2015 Construction Projects

Updated - Tuesday, April 17, 2018

- Bridge Lane
- Green Manor North
- Mullen Road
- Parsons Road
- Pavement Preservation Year Three
- Pavement Preservation Year Four
- Pine Grove - Tanglewood
- Thompsonville Northeast**
- Thompsonville Southeast
- Thompsonville Southwest
- Town Farm Road

Thompsonville Northeast

Contact: J.P. Rodriguez - ROADS Engineer

Streets: Dover Road, Eleanor Road, Foxcroft Road, Freemont Road, Leonard Road and Montano Road

Designer: BETA Group
Inspector: BETA Group
Contractor: Hinckley Construction, Inc.

Project Update:

On Wednesday 04/18, at the Town Hall in the Council Chambers at 6:30 PM, an Informational Neighborhood Meeting will be held to inform the residents of the upcoming road work. Please see attached notice of informational neighborhood meeting.

[Thompsonville Northeast Informational Meeting Notice April 11, 2018](#)

Please see the attached notification to the residents regarding Town's Policy of concrete sidewalk treatment thru driveways.

[Thompsonville Northeast Town policy regarding concrete sidewalks through driveways February 15, 2018](#)

[Notification Letter from Connecticut Water Company - March 9, 2017](#)





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

CLOSING REMARKS





DEPARTMENT OF PUBLIC WORKS ENGINEERING OFFICE

As with any construction project, the Town of Enfield is asking for patience from residents, business owners and visitors as a number of construction projects progress. We realize there is a considerable amount of construction around town and we are requiring the contractors to be sensitive to the operations of the residents and businesses located in the work area.

We know it is an inconvenience but we also know that as we make these improvements, the end product will benefit the Town of Enfield and the community as a whole. It's going to be a tremendous change.

During construction, please visit www.enfield-ct.gov for up-to-date information on this project.





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

Complete sets of construction documents are available for viewing at the end of the informational meeting.

We will be happy to assist you with any further questions you may have.





DEPARTMENT OF PUBLIC WORKS
ENGINEERING OFFICE

QUESTIONS / COMMENTS

THANK YOU!

WWW.ENFIELD-CT.GOV

